

## Revision of Lecture 4

- Information transferring across channels
  - Channel characteristics and binary symmetric channel
  - Average mutual information
- Average mutual information tells us what happens to information transmitted across channel, or it “characterises” channel
  - But average mutual information is a bit too mathematical (too abstract)
  - As an engineer, one would rather characterises channel by its physical quantities, such as **bandwidth**, signal power and noise power or **SNR**
- Also intuitively given source with information rate  $R$ , one would like to know if channel is capable of “carrying” the amount of information transferred across it
  - In other word, what is the channel **capacity**?

→ this lecture



## Review of Channel Assumptions

- No amplitude or phase distortion by the channel, and the only disturbance is due to additive white Gaussian noise (AWGN), i.e. **ideal channel**
- In the simplest case, this can be modelled by a **binary symmetric channel** (BSC)
- The channel error probability  $p_e$  of the BSC depends on the noise power  $N_P$  relative to the signal power  $S_P$ , i.e.  $\text{SNR} = S_P/N_P$
- Hence  $p_e$  could be made arbitrarily small by increasing the signal power
- The channel noise power can be shown to be  $N_P = N_0 B$ , where  $N_0/2$  is power spectral density of the noise and  $B$  the channel bandwidth

Our aim is to determine the **channel capacity**  $C$ , the maximum possible error-free information transmission rate across the channel



## Channel Capacity for Discrete Channels

- Shannon's **channel capacity**  $C$  is based on the **average mutual information** (average conveyed information across the channel), and one possible definition is

$$C = \max\{I(X, Y)\} = \max\{H(Y) - H(Y|X)\} \quad (\text{bits/symbol})$$

where  $H(Y)$  is the average information per symbol at channel output or destination entropy, and  $H(Y|X)$  error entropy

- Let  $t_i$  be the symbol duration for  $X_i$  and  $t_{av}$  be the average time for transmission of a symbol, the channel capacity can also be defined as

$$C = \max\{I(X, Y)/t_{av}\} \quad (\text{bits/second})$$

- $C$  becomes maximum if  $H(Y|X) = 0$  (no errors) and the symbols are equiprobable (assuming constant symbol durations  $t_i$ )
- Channel capacity can be expressed in either (bits/symbol) or (bits/second)



## Channel Capacity: Noise-Free Case

- Now  $I(X, Y) = H(Y) = H(X)$ , but the entropy of the source is given by:

$$H(X) = - \sum_{i=1}^q P(X_i) \log_2 P(X_i) \quad (\text{bits/symbol})$$

- Let  $t_i$  be symbol duration for  $X_i$ ; the average time for transmission of a symbol is

$$t_{av} = \sum_{i=1}^q P(X_i) \cdot t_i \quad (\text{second/symbol})$$


- By definition, the channel capacity is  $C = \max\{H(X)/t_{av}\}$  (bits/second)
- Assuming constant symbol durations  $t_i = T_s$ , the maximum or the capacity is obtained with equiprobable source symbols,  $C = \log_2 q/T_s$ , and this is the maximum achievable information transmission rate



# Channel Capacity for BSC


- BSC with equiprobable source symbols  $P(X_0) = P(X_1) = 0.5$  and variable channel error probability  $p_e$  (due to symmetry of BSC,  $P(Y_0) = P(Y_1) = 0.5$ )
- The channel capacity  $C$  (in **bits/symbol**) is given as

$$C = 1 + (1 - p_e) \log_2(1 - p_e) + p_e \log_2 p_e$$

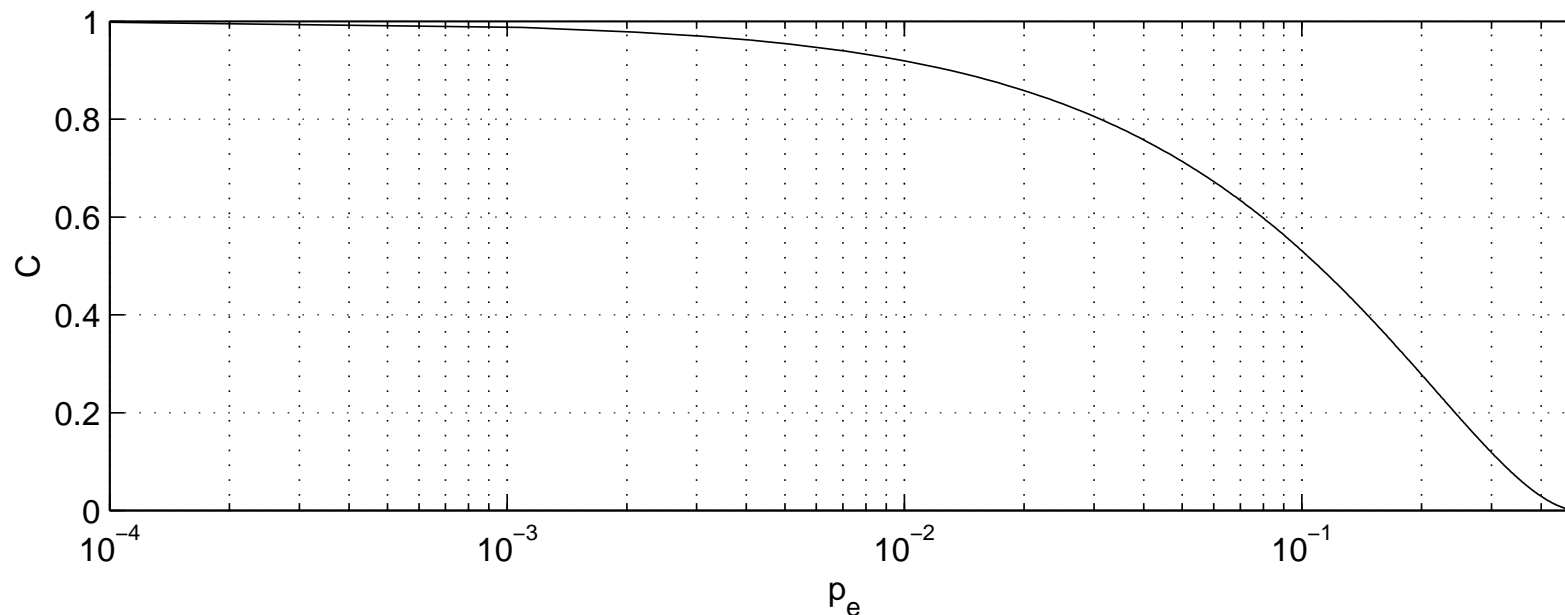

If  $p_e = 0.5$  (worst case),  $C = 0$ ; and if  $p_e = 0$  (best case),  $C = 1$

## Channel Capacity for BSC (Derivation)

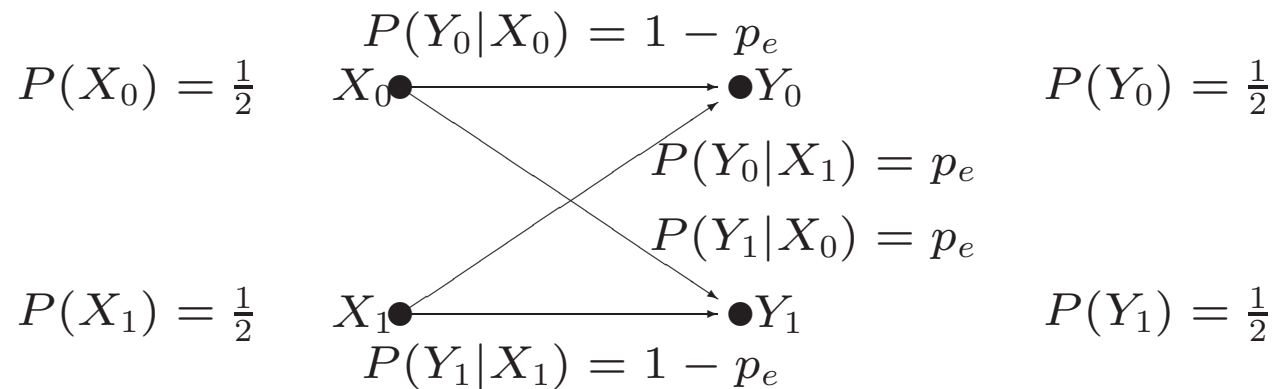

$$P(X_0, Y_0) = P(X_0)P(Y_0|X_0) = (1 - p_e)/2, \quad P(X_0, Y_1) = P(X_0)P(Y_1|X_0) = p_e/2$$

$$P(X_1, Y_0) = p_e/2, \quad P(X_1, Y_1) = (1 - p_e)/2$$

$$\begin{aligned}
 I(X, Y) = & P(X_0, Y_0) \log_2 \frac{P(Y_0|X_0)}{P(Y_0)} + P(X_0, Y_1) \log_2 \frac{P(Y_1|X_0)}{P(Y_1)} + \\
 & + P(X_1, Y_0) \log_2 \frac{P(Y_0|X_1)}{P(Y_0)} + P(X_1, Y_1) \log_2 \frac{P(Y_1|X_1)}{P(Y_1)}
 \end{aligned}$$

$$\begin{aligned}
 = & \frac{1}{2}(1 - p_e) \log_2 2(1 - p_e) + \frac{1}{2}p_e \log_2 2p_e + \frac{1}{2}p_e \log_2 2p_e + \frac{1}{2}(1 - p_e) \log_2 2(1 - p_e) \\
 = & 1 + (1 - p_e) \log_2(1 - p_e) + p_e \log_2 p_e \quad (\text{bits/symbol})
 \end{aligned}$$

# Channel Capacity and Channel Coding

- **Shannon's theorem:** If information rate  $R \leq C$ , there exists a coding technique such that information can be transmitted over the channel with arbitrarily small error probability; if  $R > C$ , error-free transmission is impossible
- $C$  is the maximum possible error-free information transmission rate
- Even in noisy channel, there is no obstruction of reliable transmission, but only a limitation of the rate at which transmission can take place
- Shannon's theorem does not tell how to construct such a capacity-approaching code
- Most practical channel coding schemes are far from optimal, but capacity-approaching codes exist, e.g. turbo codes and low-density parity check codes



# Capacity for Continuous Channels

- Entropy of a continuous (analogue) source, where the source output  $x$  is described by the PDF  $p(x)$ , is defined by

$$H(x) = - \int_{-\infty}^{+\infty} p(x) \log_2 p(x) dx$$

- According to Shannon, this entropy attains the maximum for Gaussian PDFs  $p(x)$  (equivalent to equiprobable symbols in the discrete case)
- Gaussian PDF with zero mean and variance  $\sigma_x^2$ :

$$p(x) = \frac{1}{\sqrt{2\pi}\sigma} e^{-(x^2/2\sigma^2)}$$

- The maximum entropy can be shown to be

$$H_{\max}(x) = \log_2 \sqrt{2\pi e} \sigma_x = \frac{1}{2} \log_2 2\pi e \sigma_x^2$$



## Capacity for Continuous Channels (continue)

- The signal power at the channel input is  $S_P = \sigma_x^2$
- Assuming AWGN channel noise independent of the transmitted signal, the received signal power is  $\sigma_y^2 = S_P + N_P$ , hence

$$H_{\max}(y) = \frac{1}{2} \log_2 2\pi e(S_P + N_P)$$

- Since  $I(x, y) = H(y) - H(y|x)$ , and  $H(y|x) = H(\varepsilon)$  with  $\varepsilon$  being AWGN

$$H(y|x) = \frac{1}{2} \log_2 2\pi e N_P$$

- Therefore, the average mutual information

$$I(x, y) = \frac{1}{2} \log_2 \left( 1 + \frac{S_P}{N_P} \right)$$

## Shannon-Hartley Law

- With a sampling rate of  $f_s = 2 \cdot B$ , the analogue channel capacity is given by

$$C = f_s \cdot I(x, y) = B \cdot \log_2 \left( 1 + \frac{S_P}{N_P} \right) \quad (\text{bits/second})$$

where  $B$  is the signal bandwidth

- For digital communications,  $B$  (Hz) is equivalent to the channel bandwidth, and  $f_s$  the symbol rate (symbols/second)
- Channel noise power is  $N_P = N_0 \cdot B$ , where  $N_0$  is the power spectral density of the channel AWGN
- Obvious implications:
  - Increasing the SNR  $\frac{S_P}{N_P}$  increases the channel capacity
  - Increasing the channel bandwidth  $B$  increases the channel capacity



## Bandwidth and SNR Trade off

- From the definition of channel capacity, we can trade the channel bandwidth  $B$  for the SNR or signal power  $S_P$ , and vice versa
- Depending on whether  $B$  or  $S_P$  is more precious, we can increase one and reduce the other, and yet maintain the same channel capacity
- A noiseless analogue channel ( $S_P/N_P = \infty$ ) has an infinite capacity
- $C$  increases as  $B$  increases, but it does not go to infinity as  $B \rightarrow \infty$ ; rather  $C$  approaches an upper limit

$$C = B \log_2 \left( 1 + \frac{S_P}{N_0 B} \right) = \frac{S_P}{N_0} \log_2 \left( 1 + \frac{S_P}{N_0 B} \right)^{N_0 B / S_P}$$

Recall that

$$\lim_{x \rightarrow 0} (1 + x)^{1/x} = e$$

We have

$$C_\infty = \lim_{B \rightarrow \infty} C = \frac{S_P}{N_0} \log_2 e = 1.44 \frac{S_P}{N_0}$$



## Bandwidth and SNR Trade off – Example

- **Q:** A channel has an SNR of 15. If the channel bandwidth is reduced by half, determine the increase in the signal power required to maintain the same channel capacity

- **A:**

$$B \cdot \log_2 \left( 1 + \frac{S_P}{N_0 B} \right) = B' \cdot \log_2 \left( 1 + \frac{S'_P}{N_0 B'} \right)$$

$$4 \cdot B = \frac{B}{2} \cdot \log_2 \left( 1 + \frac{(S'_P/S_P) \cdot S_P}{N_0 B/2} \right)$$

$$8 = \log_2 \left( 1 + 30 \frac{S'_P}{S_P} \right)$$

$$256 = 1 + 30 \frac{S'_P}{S_P} \quad \longrightarrow \quad S'_P = 8.5 S_P$$

# Summary

- Channel capacity for discrete channels
- Channel capacity for continuous channels
- Shannon theorem
- Bandwidth and signal power trade off

