

## Revision of Lecture Nine

- AWGN channel: decision variable  $r_k = \bar{r}_k + n_k = g_0 s_k + n_k$ , where channel  $g_0$  is a known constant,  $n_k$  AWGN with PSD  $\frac{N_0}{2}$ , average signal power or energy per symbol is  $E_s$ , and (average) channel SNR  $\tilde{\Lambda} = \frac{E_s}{N_0}$

- Bit error ratio performance:

$$\text{BPSK } P_e = Q\left(\sqrt{\frac{2E_s}{N_0}}\right) = Q\left(\sqrt{2\tilde{\Lambda}}\right)$$

$$\text{QPSK } P_e = Q\left(\sqrt{\frac{E_s}{N_0}}\right) = Q\left(\sqrt{\tilde{\Lambda}}\right)$$

$$\text{16QAM } P_e = \frac{3}{4}Q\left(\sqrt{\frac{E_s}{5N_0}}\right) + \frac{1}{2}Q\left(\sqrt{\frac{9E_s}{5N_0}}\right) - \frac{1}{4}Q\left(\sqrt{\frac{25E_s}{5N_0}}\right) \approx \frac{3}{4}Q\left(\sqrt{\frac{\tilde{\Lambda}}{5}}\right)$$

- This lecture we consider fading performance



## Performance in Flat Rayleigh Fading Channels

- A narrowband channel is represented by  $c(t) = \alpha(t) \cdot e^{j\phi(t)}$ . Assume that fading is sufficiently slow,  $c(t)$  and  $\phi(t)$  are symbol invariant  $\rightarrow$  during one symbol period

$$c = \alpha \cdot e^{j\phi}$$

- The **Rayleigh fading** envelope  $\alpha$  has a PDF

$$p_{\alpha}(\alpha) = \frac{\alpha}{\alpha_0^2} \exp\left(-\frac{\alpha^2}{2\alpha_0^2}\right), \quad \alpha \geq 0$$

and the channel phase  $\phi$  is **uniformly distributed** in  $[-\pi, \pi]$  with PDF

$$p_{\phi}(\phi) = \begin{cases} \frac{1}{2\pi}, & -\pi \leq \phi \leq \pi \\ 0, & \text{otherwise} \end{cases}$$

- Note that  $\text{Re}[c]$  and  $\text{Im}[c]$  are i.i.d. **Gaussian** with variance  $\alpha_0^2$ , and  $\alpha$  has mean  $E[\alpha] = \bar{\alpha} = \sqrt{\frac{\pi}{2}}\alpha_0$ , 2nd moment  $E[\alpha^2] = 2\alpha_0^2$  and variance  $\frac{4-\pi}{2}\alpha_0^2$

## Flat Fading Performance (continue)

- Given the transmitted baseband signal  $m(t)$  with average energy  $E_s$ , the received signal is

$$r(t) = \alpha \cdot e^{j\phi} \cdot m(t) + n(t)$$

where  $n(t)$  is AWGN with PSD  $\frac{N_0}{2}$

- Define the **instantaneous channel SNR**

$$\lambda = \alpha^2 \frac{E_s}{N_0}$$

Note that  $\lambda > 0$  is a **chi-square distribution** with PDF

$$p_\lambda(\lambda) = \frac{1}{\Lambda} e^{-\lambda/\Lambda}$$

- The **average channel SNR**  $\Lambda$  is defined as

$$\Lambda = E[\lambda] = \bar{\lambda} = 2\alpha_0^2 \frac{E_s}{N_0}$$

- Let  $P(\lambda)$  be the **instantaneous error probability**, the **average error probability** is then defined as

$$P_e = \int_0^\infty P(\lambda) p_\lambda(\lambda) d\lambda = \frac{1}{\Lambda} \int_0^\infty P(\lambda) e^{-\lambda/\Lambda} d\lambda$$

## 4QAM Flat Fading Performance

- **Fading does not change the decision boundaries**  $I, Q = 0$ , but  $I, Q = d$  becomes  $I, Q = \alpha d$
- Using **non-fading result**  $P_e = Q(d/\sqrt{N_0/2}) \rightarrow$  the **instantaneous error probability**

$$P_e(\lambda) = Q\left(\frac{\alpha d}{\sqrt{N_0/2}}\right) = Q(\sqrt{\lambda})$$

- Note  $\lambda \geq 0$  and  $\Lambda = E[\lambda] = 2\alpha_0^2 E_s/N_0$ , the **average error probability** is

$$P_e = \frac{1}{\Lambda} \int_0^{\infty} Q(\sqrt{\lambda}) e^{-\lambda/\Lambda} d\lambda$$

- Note that  $\lambda = \alpha^2 E_s/N_0$  and  $E_s = 2d^2$ , the close-form for  $P_e$  is:

$$\begin{aligned} P_e &= \int_0^{\infty} Q\left(\frac{\alpha d}{\sqrt{N_0/2}}\right) p_{\alpha}(\alpha) d\alpha = \int_0^{\infty} Q\left(\frac{\alpha d}{\sqrt{N_0/2}}\right) \frac{\alpha}{\alpha_0^2} \exp\left(-\frac{\alpha^2}{2\alpha_0^2}\right) d\alpha \\ &= \frac{1}{2} \left( 1 - \sqrt{\frac{2\alpha_0^2 d^2}{1 + 2\alpha_0^2 d^2}} \right) = \frac{1}{2} \left( 1 - \sqrt{\frac{\Lambda}{2 + \Lambda}} \right) \end{aligned}$$

## 4QAM Flat Fading Performance (derivation)

- Note

**integration formula**  $\int_0^{\infty} 2Q\left(\sqrt{2}\beta x\right) e^{-\mu x^2} x dx = \frac{1}{2\mu} \left(1 - \frac{\beta}{\sqrt{\mu + \beta^2}}\right)$

**average error probability**  $P_e = \int_0^{\infty} Q\left(\frac{\alpha d}{\sqrt{N_0/2}}\right) \frac{\alpha}{\alpha_0^2} \exp\left(-\frac{\alpha^2}{2\alpha_0^2}\right) d\alpha$

$$= \int_0^{\infty} 2Q\left(\sqrt{2} \frac{d\alpha_0}{\sqrt{N_0/2}} \frac{\alpha}{\sqrt{2}\alpha_0}\right) \exp\left(-\frac{\alpha^2}{2\alpha_0^2}\right) \frac{\alpha}{\sqrt{2}\alpha_0} d\left(\frac{\alpha}{\sqrt{2}\alpha_0}\right)$$

- Letting  $\mu = 1$ ,  $\beta = \frac{d\alpha_0}{\sqrt{N_0/2}}$  and  $x = \frac{\alpha}{\sqrt{2}\alpha_0}$  in the above **integration formula** leads to

$$P_e = \frac{1}{2} \left(1 - \frac{\frac{d\alpha_0}{\sqrt{N_0/2}}}{\sqrt{1 + \left(\frac{d\alpha_0}{\sqrt{N_0/2}}\right)^2}}\right) = \frac{1}{2} \left(1 - \sqrt{\frac{2\alpha_0^2 \frac{d^2}{N_0}}{1 + 2\alpha_0^2 \frac{d^2}{N_0}}}\right) = \frac{1}{2} \left(1 - \sqrt{\frac{\Lambda}{2 + \Lambda}}\right)$$

where  $\Lambda = 2\alpha_0^2 \frac{E_s}{N_0}$ ,  $E_s = 2d^2 \Rightarrow \Lambda = \frac{4\alpha_0^2 d^2}{N_0}$

## 4QAM Fading / Non-Fading BER Comparison

- In fading, average SNR  $\Lambda = 2\alpha_0^2 \frac{E_s}{N_0}$


Average BER

$$P_e = \frac{1}{2} \left( 1 - \sqrt{\frac{\Lambda}{2 + \Lambda}} \right)$$

- Compare with AWGN, average SNR is defined as  $\tilde{\Lambda} = E_s/N_0$

Average error probability

$$P_e = Q \left( \sqrt{\tilde{\Lambda}} \right)$$

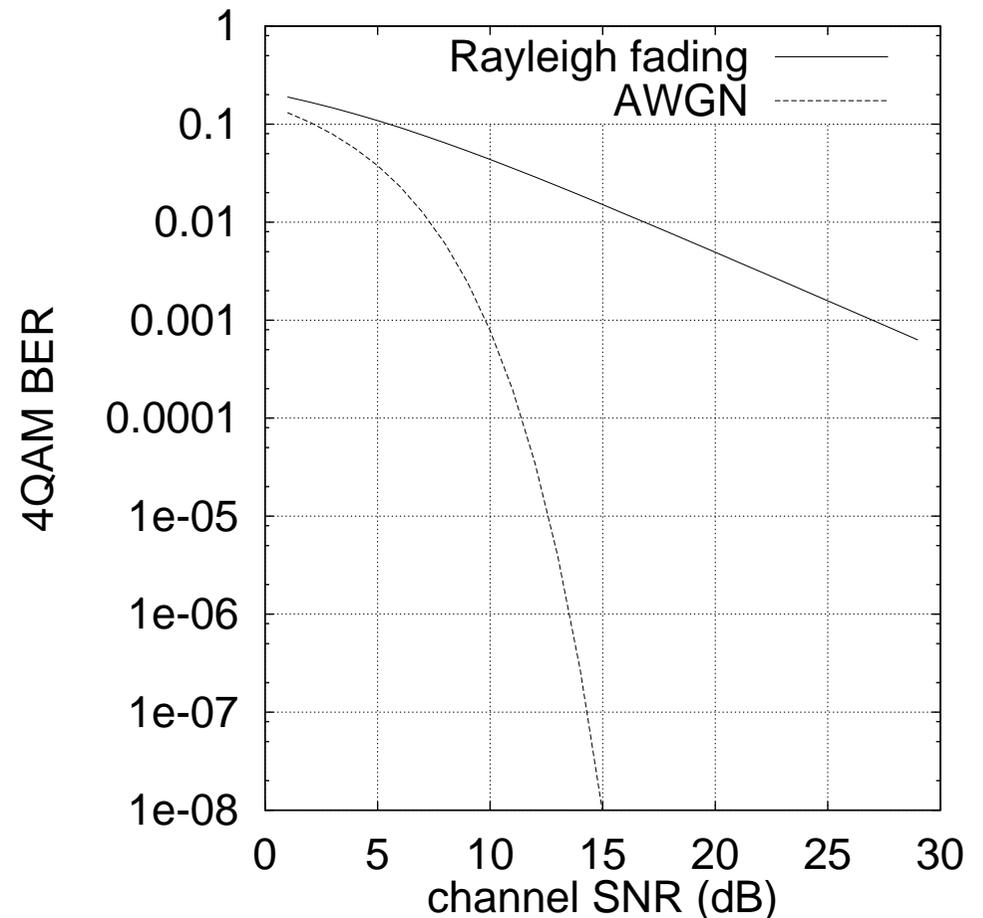

It is clear that fading is “a big **killer**” limiting communication system’s performance

# 16QAM Flat Fading Performance: C1 BER

- For C1 bits, the decision boundaries are not changed:

$$I, Q > 0 \rightarrow i_1, q_1 = 0, \quad I, Q \leq 0 \rightarrow i_1, q_1 = 1$$

But  $\pm d, \pm 3d$  become  $\pm \alpha d, \pm 3\alpha d$ . Also  $E_s = 10d^2$  and  $\Lambda = 20\alpha_0^2 d^2 / N_0$

- Thus, the instantaneous C1 error probability is

$$P_{e,1}(\lambda) = \frac{1}{2}Q\left(\frac{\alpha d}{\sigma_n}\right) + \frac{1}{2}Q\left(\frac{3\alpha d}{\sigma_n}\right) = \frac{1}{2}Q\left(\sqrt{\frac{\lambda}{5}}\right) + \frac{1}{2}Q\left(3\sqrt{\frac{\lambda}{5}}\right)$$

- The average C1 error probability is therefore

$$\begin{aligned} P_{e,1} &= \frac{1}{\Lambda} \int_0^\infty P_{e,1}(\lambda) e^{-\lambda/\Lambda} d\lambda = \frac{1}{4} \left( 1 - \sqrt{\frac{2\alpha_0^2 \frac{d^2}{N_0}}{1 + 2\alpha_0^2 \frac{d^2}{N_0}}} \right) + \frac{1}{4} \left( 1 - \sqrt{\frac{18\alpha_0^2 \frac{d^2}{N_0}}{1 + 18\alpha_0^2 \frac{d^2}{N_0}}} \right) \\ &= \frac{1}{4} \left( 1 - \sqrt{\frac{\Lambda}{10 + \Lambda}} \right) + \frac{1}{4} \left( 1 - \sqrt{\frac{9\Lambda}{10 + 9\Lambda}} \right) \end{aligned}$$

# 16QAM Fading Performance: C2 BER

- For C2 bits, the decision boundaries are changed to:

$$I, Q > 2\bar{\alpha}d \text{ or } I, Q \leq -2\bar{\alpha}d \rightarrow i_2, q_2 = 1$$


$$-2\bar{\alpha}d < I, Q \leq 2\bar{\alpha}d \rightarrow i_2, q_2 = 0$$

Note that the average value of  $\alpha$ , i.e.  $\bar{\alpha}$ , has to be used for decision threshold

- Two cases of  $i_2, q_2 = 0$  error need consideration

1.  $i_2, q_2 = 0$  error in case of  $\alpha < 2\bar{\alpha}$   $\alpha < 2\bar{\alpha}$ :

- Instantaneous symbols  $-\alpha d$  and  $\alpha d$  are within region defined by two decision boundaries
- Error occurs when noise makes received signal outside the region and instantaneous C2 bit = 0 error probability for  $\alpha < 2\bar{\alpha}$  is

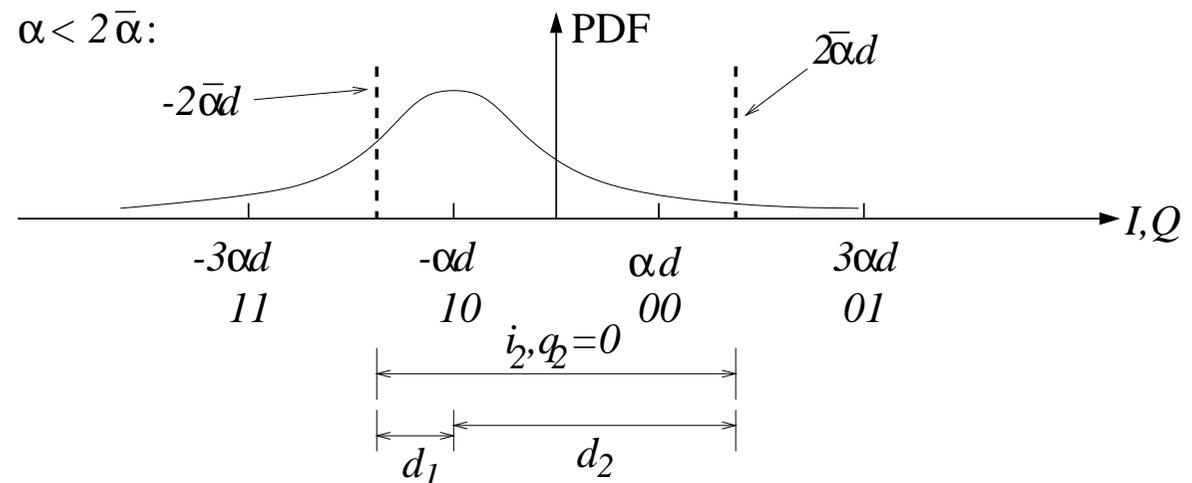


$$P_{2,0,<2}(\alpha) = Q\left(d_1/\sqrt{N_0/2}\right) + Q\left(d_2/\sqrt{N_0/2}\right) = Q\left(\frac{(2\bar{\alpha} - \alpha)d}{\sqrt{N_0/2}}\right) + Q\left(\frac{(2\bar{\alpha} + \alpha)d}{\sqrt{N_0/2}}\right)$$

## 16QAM: C2 BER (continue)

2.  $i_2, q_2 = 0$  error in the case of  $\alpha > 2\bar{\alpha}$ : Instantaneous symbols  $-\alpha d$  and  $\alpha d$  are outside region defined by two decision boundaries

- Correct decision occurs only when noise moves received signal inside the region
- Thus instantaneous C2 bit = 0 error probability for  $\alpha > 2\bar{\alpha}$  is

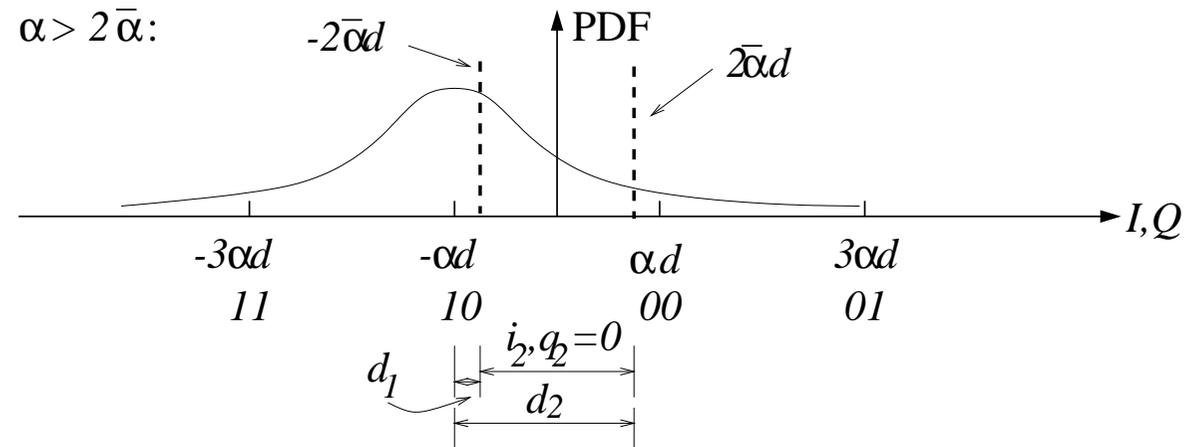

$$P_{2,0,>2}(\alpha) =$$

$$1 - Q\left(d_1/\sqrt{N_0/2}\right) + Q\left(d_2/\sqrt{N_0/2}\right) = 1 - Q\left(\frac{(-2\bar{\alpha} + \alpha)d}{\sqrt{N_0/2}}\right) + Q\left(\frac{(2\bar{\alpha} + \alpha)d}{\sqrt{N_0/2}}\right)$$

- Note  $\alpha > 0$ , the average error for  $i_2, q_2 = 0$  is therefore

$$P_{2,0} = \int_0^{2\bar{\alpha}} P_{2,0,<2}(\alpha)p_\alpha(\alpha)d\alpha + \int_{2\bar{\alpha}}^\infty P_{2,0,>2}(\alpha)p_\alpha(\alpha)d\alpha$$

There exists closed form solution for this integration but it is very complicated


## 16QAM: C2 BER (continue)

- Two cases of  $i_2, q_2 = 1$  error need consideration

### 1. $i_2, q_2 = 1$ error in case of $\alpha > 2\bar{\alpha}/3$

– Instantaneous symbols  $-3\alpha d$  and  $3\alpha d$  are within correct regions corresponding to respective decision boundaries

– Error occurs when noise makes received signal outside the corresponding region

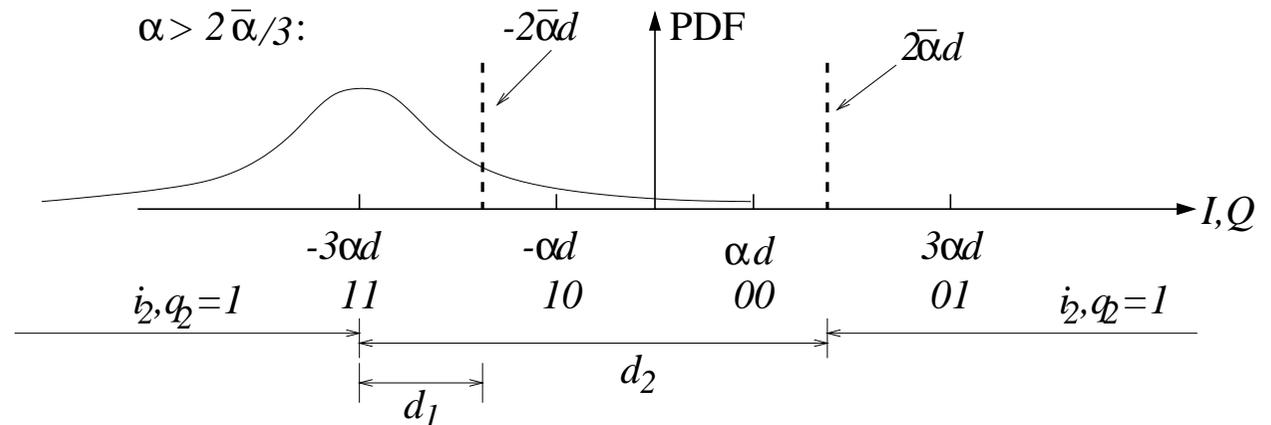

– Thus instantaneous C2 bit = 1 error probability for  $\alpha > 2\bar{\alpha}/3$  is

$$\begin{aligned}
 P_{2,1,>2/3}(\alpha) &= Q\left(d_1/\sqrt{N_0/2}\right) - Q\left(d_2/\sqrt{N_0/2}\right) \\
 &= Q\left(\frac{(3\alpha - 2\bar{\alpha})d}{\sqrt{N_0/2}}\right) - Q\left(\frac{(3\alpha + 2\bar{\alpha})d}{\sqrt{N_0/2}}\right)
 \end{aligned}$$


## 16QAM: C2 BER (continue)

2.  $i_2, q_2 = 1$  error in case of  $\alpha < 2\bar{\alpha}/3$

- Instantaneous symbols  $-3\alpha d$  and  $3\alpha d$  are outside correct regions defined by respective decision boundaries

- Correct decision occurs only when noise moves received signal to the correct region

- The instantaneous C2 bit = 1 error probability for  $\alpha < 2\bar{\alpha}/3$  is

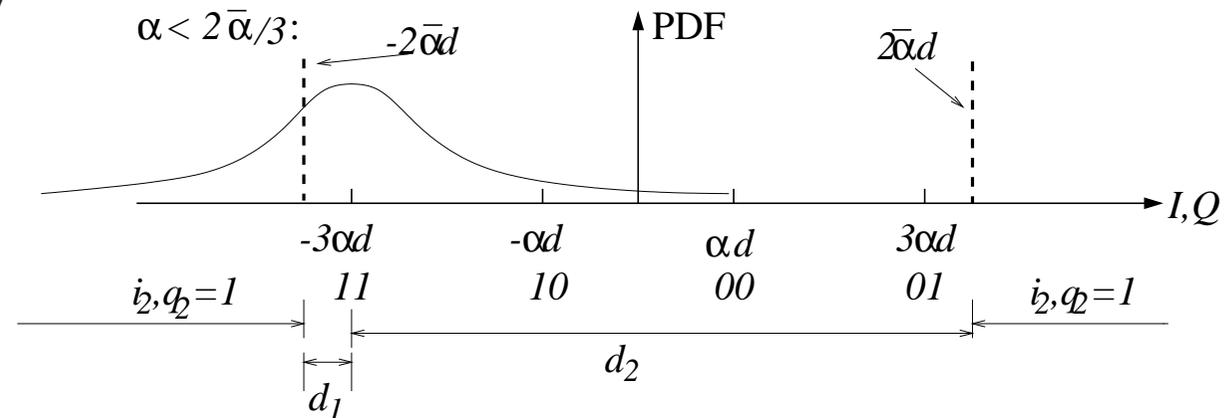

$$P_{2,1,<2/3}(\alpha) = 1 - Q\left(d_1/\sqrt{N_0/2}\right) - Q\left(d_2/\sqrt{N_0/2}\right)$$

$$= 1 - Q\left(\frac{(2\bar{\alpha} - 3\alpha)d}{\sqrt{N_0/2}}\right) - Q\left(\frac{(2\bar{\alpha} + 3\alpha)d}{\sqrt{N_0/2}}\right)$$

- The average error for  $i_2, q_2 = 1$  is therefore

$$P_{2,1} = \int_0^{2\bar{\alpha}/3} P_{2,1,<2/3}(\alpha)p_\alpha(\alpha)d\alpha + \int_{2\bar{\alpha}/3}^{\infty} P_{2,1,>2/3}(\alpha)p_\alpha(\alpha)d\alpha$$

## 16QAM Fading BER (continue)


- Thus average C2 error probability is

$$P_{e,2} = \frac{1}{2}(P_{2,0} + P_{2,1})$$

- Therefore the average error probability for 16QAM is

$$P_e = \frac{1}{2}(P_{e,1} + P_{e,2})$$

- 16QAM fading / non-fading BER comparison:
- Fading degrades BER performance seriously  $\Rightarrow$  counter fading measures

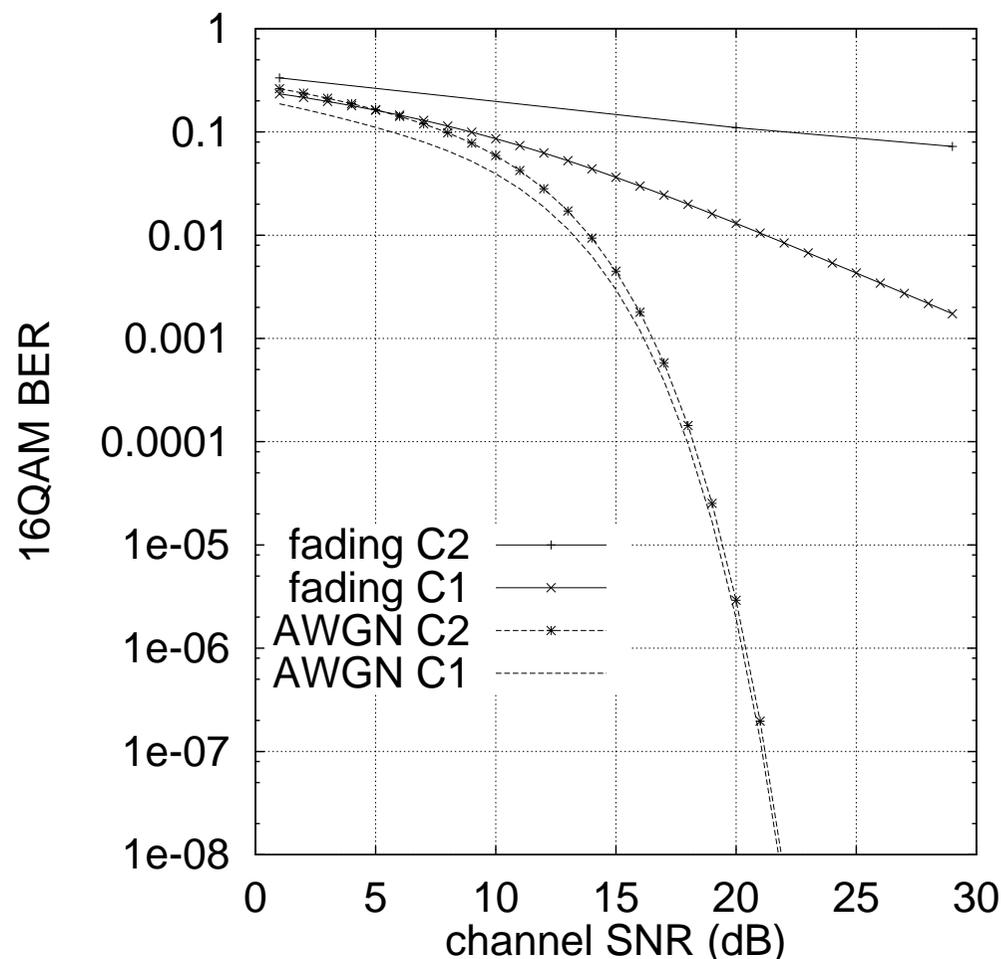

Alternatively, Monte Carlo simulation is often used to evaluate fading BER

Recall slide 35 for flat Rayleigh fading channel simulation

## Summary

- Narrowband Rayleigh fading channel: fading envelope and phase PDFs, instantaneous and average channel SNRs, instantaneous and average error probabilities
- 4QAM fading performance: decision boundaries remain  $I, Q = 0$ , instantaneous error probability by substituting  $\alpha d$  for  $d$  in AWGN result, close-form average error probability
- 16QAM fading performance:
  - ★ C1 decision boundaries remain  $I, Q = 0$ , C1 instantaneous error probability by substituting  $\alpha d$  and  $3\alpha d$  for  $d$  and  $3d$  in AWGN result, C1 close-form average error probability
  - ★ C2 decision boundaries are changed from  $I, Q = \pm 2d$  to  $I, Q = \pm 2\bar{\alpha}d$

Instantaneous error probability for  $i_2, q_2 = 0$ : (1)  $\alpha < 2\bar{\alpha}$ , (2)  $\alpha > 2\bar{\alpha}$ ; average error probability

Instantaneous error probability for  $i_2, q_2 = 1$ : (1)  $\alpha < 2\bar{\alpha}/3$ , (2)  $\alpha > 2\bar{\alpha}/3$ ; average error probability