

Global Optimal Realizations of Finite Precision Digital Controllers

J. Wu[†], S. Chen[‡], G. Li[§] and J. Chu[†]

[†] National Key Laboratory of Industrial Control Technology
Zhejiang University, Hangzhou, 310027, P. R. China

[‡] Department of Electronics and Computer Science
University of Southampton, Southampton SO17 1BJ, U.K.

[§] School of Electrical and Electronic Engineering
Nanyang Technological University, Singapore

Presented at 41st IEEE CDC, December 10-13, 2002
Las Vegas, Nevada, USA

Support of U.K. Royal Society is gratefully acknowledged

Problem Definition

- Plant: $P(z) \sim (\mathbf{A}_P, \mathbf{B}_P, \mathbf{C}_P)$; $\mathbf{A}_P \in \mathcal{R}^{m \times m}$, $\mathbf{B}_P \in \mathcal{R}^{m \times l}$, $\mathbf{C}_P \in \mathcal{R}^{q \times m}$.
- Controller: $C(z) \sim (\mathbf{A}_C, \mathbf{B}_C, \mathbf{C}_C, \mathbf{D}_C)$; $\mathbf{A}_C \in \mathcal{R}^{n \times n}$, $\mathbf{B}_C \in \mathcal{R}^{n \times q}$, $\mathbf{C}_C \in \mathcal{R}^{l \times n}$, $\mathbf{D}_C \in \mathcal{R}^{l \times q}$.

Denote an initially designed controller realization as \mathbf{X}_0 and a generic realization \mathbf{X} . Let $\overline{\mathbf{A}}(\mathbf{X})$ be the closed-loop transition matrix with \mathbf{X} .

- Controller realization set

$$\mathcal{S}_C \triangleq \{ \mathbf{X} : \mathbf{A}_C = \mathbf{T}^{-1} \mathbf{A}_C^0 \mathbf{T}, \mathbf{B}_C = \mathbf{T}^{-1} \mathbf{B}_C^0, \mathbf{C}_C = \mathbf{C}_C^0 \mathbf{T}, \mathbf{D}_C = \mathbf{D}_C^0 \}$$

where $\mathbf{T} \in \mathcal{R}^{n \times n}$ is an arbitrary non-singular matrix

- All $\mathbf{X} \in \mathcal{S}_C$ are equivalent in infinite precision implementation: an identical set of closed-loop eigenvalues $\lambda_i(\overline{\mathbf{A}}(\mathbf{X}))$, $1 \leq i \leq m+n$, which are all within the unit disk.

Motivations and Background

Finite precision controller implementation can seriously influence closed-loop performance.

- Two types of finite word length errors: roundoff errors in arithmetic operations – controller signal errors, and controller coefficient representation errors – controller parameter errors.

This work is concerned with FWL controller parameter errors, which have critical influence on closed-loop stability.

- Two strategies: direct and indirect.

This work adopts an indirect approach.

- We present a novel search algorithm for global solutions to an existing optimal finite precision controller realization problem.

Closed-Loop Stability Robustness Measure

- In FWL fixed-point implementation, $\mathbf{X} \rightarrow \mathbf{X} + \Delta \mathbf{X}$ and $\lambda_i(\overline{\mathbf{A}}(\mathbf{X})) \rightarrow \lambda_i(\overline{\mathbf{A}}(\mathbf{X} + \Delta \mathbf{X}))$.
- Closed-loop stability measure (Li 1998)

$$f(\mathbf{X}) \triangleq \min_{i \in \{1, \dots, m+n\}} \frac{1 - |\lambda_i(\overline{\mathbf{A}}(\mathbf{X}))|}{\sqrt{N} \left\| \frac{\partial \lambda_i(\overline{\mathbf{A}}(\mathbf{X}))}{\partial \mathbf{X}} \right\|_F}$$

where $N = (l+n)(q+n)$ and $\|\cdot\|_F$ the Frobenius norm.

- $f(\mathbf{X})$ quantifies the “robustness” of closed-loop stability for the realization \mathbf{X} to FWL controller perturbations:

Under some mild conditions, the larger $f(\mathbf{X})$, the larger the FWL error $\Delta \mathbf{X}$ that controller \mathbf{X} can tolerate without causing closed-loop instability.

Optimal Realization Problem

- The optimal FWL controller realization problem (Li 1998)

$$v \triangleq \max_{\mathbf{X} \in \mathcal{S}_C} f(\mathbf{X})$$

- Closed-form solutions was attempted in (Li 1998), but ended with suboptimal solutions.
- Direct numerical optimization has to apply: computationally costly and no way to know if a solution obtained is a global optimal solution.
- Our two-stage approach:
 1. Construct a closed-form realization set that contains global optimal solutions under a mild condition;
 2. Search in this set for a global solution with a numerical algorithm that are much more efficient than usual numerical optimization.

Remarks

- The assumption that *Condition #* can be met is a reasonable one.
- It turns out that the set

$$\mathcal{X} \triangleq \{\mathbf{X} : g(\mathbf{X}, k_1) = \rho_{k_1}, \mathbf{X} \in \mathcal{S}_C\}$$

can be constructed in a closed-form. Since $\mathbf{X} = \mathbf{X}(\mathbf{T})$, \mathcal{X} is defined on the transformation set

$$\mathcal{T} \triangleq \{\mathbf{T} : g(\mathbf{X}(\mathbf{T}), k_1) = \rho_{k_1}, \mathbf{T} \in \mathcal{R}^{n \times n}, \det \mathbf{T} \neq 0\}$$

- \mathcal{T} can be searched for an \mathbf{T}_{opt} meeting

$$g(\mathbf{X}(\mathbf{T}_{\text{opt}}), k) \geq \rho_{k_1}, \quad \forall k \in \{1, \dots, m+n\} \setminus \{k_1\}$$

- This is much more efficient than minimizing $f(\mathbf{X})$ over \mathcal{S}_C . Moreover, if a solution can be found in this way it is a global optimum for sure.

Single-Pole Stability Functions and Their Peaks

- $\forall k \in \{1, \dots, m+n\}$, define the single-pole FWL stability function of \mathbf{X}

$$g(\mathbf{X}, k) \triangleq \frac{1 - |\lambda_k(\overline{\mathbf{A}}(\mathbf{X}))|}{\sqrt{N} \left\| \frac{\partial \lambda_k(\overline{\mathbf{A}}(\mathbf{X}))}{\partial \mathbf{X}} \right\|_F}$$

and further define the single-pole peak of FWL stability as

$$\rho_k \triangleq \max_{\mathbf{X} \in \mathcal{S}_C} g(\mathbf{X}, k)$$

- Theorem 1** $v = \rho_{k_1} \triangleq \min_{k \in \{1, \dots, m+n\}} \rho_k$ if and only if there exists $\mathbf{X}_{\text{opt}} \in \mathcal{S}_C$ and $k_1 \in \{1, \dots, m+n\}$ such that $g(\mathbf{X}_{\text{opt}}, k_1) = \rho_{k_1}$ and

$$\textit{Condition \#} : g(\mathbf{X}_{\text{opt}}, k) \geq \rho_{k_1}, \quad \forall k \in \{1, \dots, m+n\} \setminus \{k_1\}$$

Obviously, such an \mathbf{X}_{opt} is a global optimal solution.

Closed-Form Transformation Set

- Let \mathbf{p}_k and \mathbf{y}_k be the right and reciprocal left eigenvectors related to the closed-loop eigenvalue λ_k , respectively.
- Theorem 2** The value of ρ_k is easily determined, and $g(\mathbf{X}(\mathbf{T}), k)$ achieves the maximum ρ_k if and only if

$$\mathbf{T} = \mathbf{Q} \begin{bmatrix} \mathbf{H}^{1/2} & \mathbf{0} \\ \mathbf{F}(\mathbf{H}^{1/2})^{-T} & \mathbf{\Omega} \end{bmatrix} \mathbf{V}$$

where $\mathbf{V} \in \mathcal{R}^{n \times n}$ is an arbitrary orthogonal matrix, the orthogonal matrix \mathbf{Q} is known, and

1. complex \mathbf{p}_k and \mathbf{y}_k : $\mathbf{\Omega} \in \mathcal{R}^{(n-2) \times (n-2)}$ is an arbitrary nonsingular matrix, the 2×2 matrix \mathbf{H} and the $(n-2) \times 2$ matrix \mathbf{F} are known;
2. real \mathbf{p}_k and \mathbf{y}_k : $\mathbf{\Omega} \in \mathcal{R}^{(n-1) \times (n-1)}$ is an arbitrary nonsingular matrix, the scalar $\mathbf{H}^{1/2} = \sqrt{h}$ and the $(n-1) \times 1$ vector \mathbf{F} are known.

Search Algorithm

- According to **Theorem 2** and setting $\mathbf{V} = \mathbf{I}$, \mathcal{T} is given in the form:

$$\mathcal{T} = \left\{ \mathbf{T}(\Omega) : \mathbf{T}(\Omega) = \mathbf{Q} \begin{bmatrix} \mathbf{H}^{1/2} & \mathbf{0} \\ \mathbf{F}(\mathbf{H}^{1/2})^{-T} & \Omega \end{bmatrix} \right\}$$


- The objective: search for a nonsingular $\Omega_{\text{opt}} \in \mathcal{R}^{(n-2) \times (n-2)}$ such that

$$g(\mathbf{X}(\mathbf{T}(\Omega_{\text{opt}})), k) \geq \rho_{k_1}, \quad \forall k \in \{1, \dots, m+n\} \setminus \{k_1\}$$

(If λ_{k_1} is real-valued, $\Omega \in \mathcal{R}^{(n-1) \times (n-1)}$.)

- Notice that $g(\mathbf{X}(\mathbf{T}(\Omega)), k)$ is differentiable with respect to Ω .
- With the derivative, we know how to change Ω so that $g(\mathbf{X}, k)$ increase for those $g(\mathbf{X}, k) < \rho_{k_1}$, and $g(\mathbf{X}, k)$ do not decrease for those $g(\mathbf{X}, k) \geq \rho_{k_1} \Rightarrow \Omega$ is updated iteratively until all the $g(\mathbf{X}, k) \geq \rho_{k_1}$.

Iterative Search

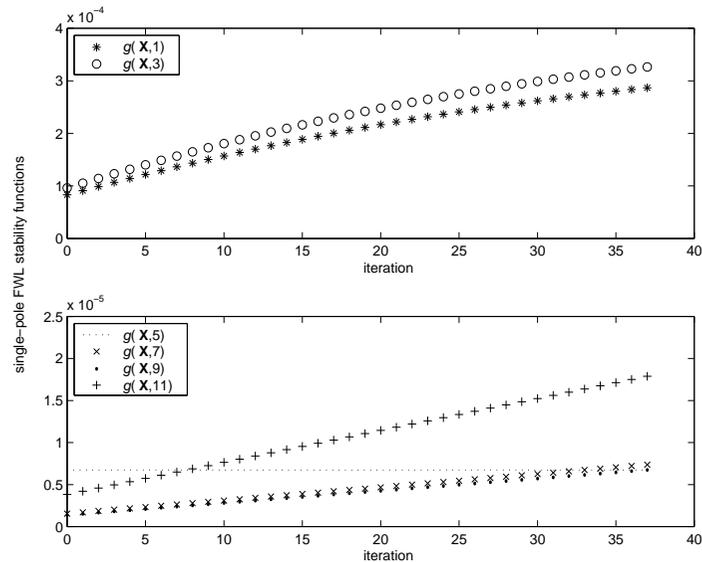

Design Example

- Li (1998): $m = 5$, $n = 6$, $l = q = 1$; a closed-loop system of order 11.
- The controller transfer function $C(z)$ has been given with the companion canonical form of $C(z)$ as the initial realization.
- The closed-loop system: five pairs conjugate complex-valued eigenvalues $\lambda_{1,2}$, $\lambda_{3,4}$, $\lambda_{5,6}$, $\lambda_{7,8}$ and $\lambda_{9,10}$, and one real-valued eigenvalue λ_{11} .
- The single-pole peaks of FWL stability are

$$\begin{aligned} \rho_{1,2} &= 2.5072e - 3, & \rho_{3,4} &= 2.1295e - 3, & \rho_{5,6} &= 6.7344e - 6, \\ \rho_{7,8} &= 2.8586e - 3, & \rho_{9,10} &= 3.0832e - 3, & \rho_{11} &= 4.3181e - 3. \end{aligned}$$
- The minimum value of all the ρ_k s is ρ_5 (or ρ_6) $\Rightarrow k_1 = 5$ and the matrices \mathbf{Q} , \mathbf{H} and \mathbf{F} are determined $\Rightarrow \mathcal{T} = \{\mathbf{T}(\Omega)\}$.

Global Optimal Solution

- During each iteration, $\mathbf{X}(\mathbf{T}(\Omega))$ meets: 1) $g(\mathbf{X}, k)$ increase for those $g(\mathbf{X}, k) < \rho_{k_1}$; 2) $g(\mathbf{X}, k)$ do not decrease for those $g(\mathbf{X}, k) \geq \rho_{k_1}$.
- At the 37th iteration, a global optimal realization $\mathbf{X}(\mathbf{T}(\Omega_{\text{opt}}))$ is found, since at this stage *Condition ‡* is met:

$$g(\mathbf{X}(\mathbf{T}(\Omega_{\text{opt}})), k) \geq \rho_{k_1}, \quad k \in \{1, 2, \dots, 11\} \setminus \{5, 6\}$$

and the search algorithm terminated.

- Values of the closed-loop stability measure for the initial and global optimal realizations \mathbf{X}_0 and $\mathbf{X}(\mathbf{T}_{\text{opt}})$ are:

$$f(\mathbf{X}_0) = 3.1797 \times 10^{-11} \quad f(\mathbf{X}(\mathbf{T}_{\text{opt}})) = 6.7344 \times 10^{-6}$$

a factor of 2×10^5 improvement in the closed-loop FWL stability measure.

Conclusions and Future Works

- We have developed an efficient method to solve the optimal controller realization problem based on maximizing a closed-loop FWL stability measure.
 1. This method does not suffer from the drawbacks associated with using direct numerical optimization methods to tackle the problem.
 2. under a reasonable and mild condition, our method can find global optimal controller realizations for most practical systems.

- The arbitrary orthogonal matrix $\mathbf{V} \in \mathcal{R}^{n \times n}$ in the closed-form transformation set \mathcal{T} can be explored to design:
 1. global optimal (in closed-loop stability sense) realizations of fixed-point controller with the smallest dynamic range.
 2. sparse global optimal realizations of fixed-point controller.